




Applications

- Home, Office
- Laboratory
- Hospital
- Green House
- Hotels and many more....



THM-1

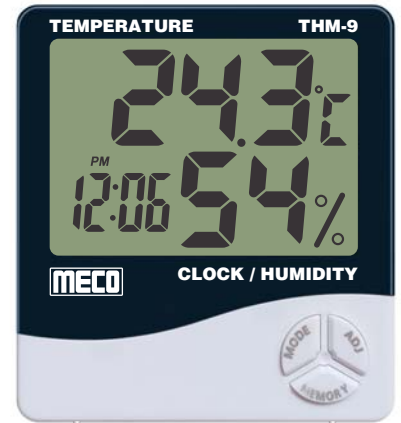

THM-9

Specifications

Functions	°C / °F Selection, MAX / MIN, Integral Hour Alarm, Clock & Calendar	°C / °F Selection, MAX / MIN, Integral Hour Alarm, Clock & Calendar
Display	Temperature, Humidity and Time Simultaneously	Temperature, Humidity and Time Simultaneously
Temperature Range	-10°C ~ 50°C / 14°F ~ 122°F	-10°C ~ 50°C / 14°F ~ 122°F
Temperature Accuracy	± 1.0°C / ± 1.8°F	± 2.0°C / ± 3.6°F
Temperature Resolution	0.1°C / 0.1°F	0.1°C / 0.1°F
Humidity Range	10%RH ~ 99%RH	10%RH ~ 99%RH
Humidity Accuracy	± 5% RH	± 10% RH
Humidity Resolution	1%RH	1%RH
Power	One 1.5V "AAA" Battery	One 1.5V "AAA" Battery
Dimensions	103 x 93 x 24mm (approx.)	103 x 93 x 24mm (approx.)
Weight	90gms (approx.) Including Battery	106gms (approx.) Including Battery
Accessories	Battery : 1.5V AAA x 1, Blister & Manual	Battery : 1.5V AAA x 1, Blister & Manual

Digital LUX Meter with Flexible Sensor

Functions	MAX / MIN, Backlight, Auto Power Off with Disable Feature, Data Hold
Range	0.1 ~ 200,000 lux 0.0 ~ 20,000 fc
Accuracy	±3% + 30 dgt
Resolution	0.1 lux or 0.1 fc
Selection	lux / fc
Power	1.5V AAA x 2 Batteries
Dimensions	157 x 54 x 34mm (approx.)
Weight	70gms Including Battery (approx.)
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (installed)



930T